


# SURREY PTFE TAPES

## Pure Polytetrafluoroethylene (PTFE)

Yellow Gas Tape

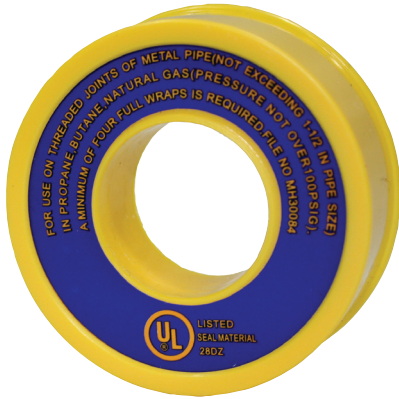

Pink Tape




## Specifications

<b>Tape Length:</b>	6.6 Metres	<b>Max Pressure (Water):</b>	2000 kPa
<b>Tape Width:</b>	12.7mm	<b>Max Pressure (Gas):</b>	690 kPa
<b>Tape Thickness:</b>	0.1mm		
<b>Tape Density:</b>	1g /cm <sup>3</sup>		

*Temperature Range, minus 260 Deg C to plus 260 Deg C*

- PTFE tape can be used on pipe made from galvanised steel, iron, brass, copper, aluminum, stainless steel, polyethylene, polypropylene, PVC, CPVC, ABS or fibreglass.
- Suitable for use on pipes carrying the following materials: Water, Natural and LPG Gas, Diesel fuel, oil, gasoline, alcohols, heating oils, hydraulic fluids, and steam.
- Store in a cool, dry conditions between 5°C and 25°C.
- Do not use on pipes, which contain liquid oxygen or flourine.
- Suitable for use with Potable water
- Non- Flammable
- Non- Hardening
- Non- Toxic
- Unlimited Shelf Life



(C<sub>2</sub>F<sub>4</sub>)<sub>n</sub>

Cas Number :9002-84-0